




AGRITEC – Rotary tiller UO40/UF40

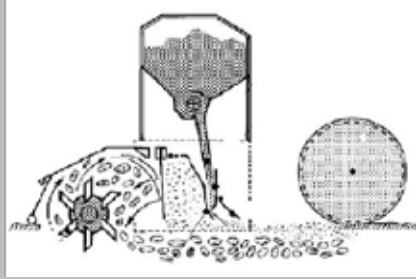

Short description of UO40/UF40

The **AGRITEC** rotary tiller of the UF/UF40 series has been developed for the use with compact and municipal vehicles, as well as agricultural carrier vehicles up to 60 hp.

With the **AGRITEC** rotary tiller UF40 the workload is reduced to a minimum at the new installation and regeneration of green spaces. The UO40 version is equipped just as the UF40, but without the seed box and the broadcast sowing device. It is used for a perfect seedbed preparation.

OPERATION:

1. The tiller blades, which rotate against the direction of travel, pick up the soil and throw it against a high-quality steel grid. The rough soil components are sieved through the grid and fall to the milling pit in front of the grid.
2. The oscillating levelling plate eliminates the unevenness.
3. The broadcast sowing system distributes the seeds width wise. Tufts and the growth of rows are avoided.
4. The second levelling blade lightly pushes in the seeds.
5. The large grid roller (diameter 40 cm, 30 cm above tilling width) presses against the processed soil material and serves for the reconsolidation of the soil.

Model	Operating width	External width	Side shift	Weight		Blade	Power requirement
				UF	UO		
UF40 / UO40-100V	93 cm	120 cm	15 cm	460 kg	372 kg	24	22 – 60 hp
UF40 / UO40-120V	115 cm	142 cm	26 cm	515 kg	412 kg	30	25 – 60 hp
UF40 / UO40-140V	137 cm	164 cm	37 cm	563 kg	452 kg	36	35 – 60 hp
UF40 / UO40-160V	160 cm	186 cm	48 cm	622 kg	503 kg	42	45 – 60 hp



Technical features

- For carrier vehicles of 22 hp to 60 hp
- Working widths of **100 cm to 160 cm**
- **Hydraulic side shift** as a standard equipment
- **CAT.1 and CAT.2 rear mounting**
- Working depth **adjustable up to 12 cm**
- UO40 without seed box / UF40 with broadcast sowing device

AGRITEC specialist dealer



WAM GmbH **AGRITEC**
 Dornierstr. 10 D-68804 Altlußheim
 Phone: + 49 (0) 6205 3949 0 fax +49 (0) 6205 3949 49

www.**AGRITEC**.de

