



Short description of BC300/BC350

The AGRITEC embankment mower of the BC300 and BC350 series has been specifically designed for narrow track tractors that have a track width of minimum 100 cm. This makes it suitable for the maintenance of private green spaces and parks.

It is very manoeuvrable and extremely versatile due to the high connection point of the first arm.

Due to the innovative technology and its comfortable operation, the mowing of embankments will be easy and convenient.


High quality workmanship and effective components guarantee an impressive quality of work.

In case of the BC300, the hydraulic motor is mounted directly on the $\ensuremath{\mathsf{PTO}}$ drive.



Model	Operating width	Extension arm	Weight arm	Power req. tractor	Tractor weight/min.	Tractor track width	Angle head	Liter	Liter/ min
BC300	80 cm	310 cm	310 kg	ab 16 PS	>800 kg	>100 cm	230°	65	40
BC350	80 cm	355 cm	455 kg	ab 25 PS	>1000 kg	>120 cm	230°	75	56

Dimensions (cm)													
Model	А	В	С	D	Е	F	G	Н	I	L	М	Ν	0
BC300	302	127	-	-	-	389	244	-	-	-	80	-	181
BC350	345	165	65	90	230	440	300	245	200	135	80	140	190

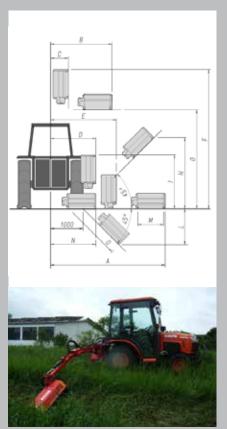

Technical features

- CAT.1 three-point rear or front mounting (only for BC300)
- Designed with safety chains
- Tool head with floating position
- Operation via control lever, electric control available optionally
- Mowing head: 80 cm
- Rotor with bidirectional rotation
- 135 cm hedge trimmer optionally available

AGRITEC specialist dealer

